
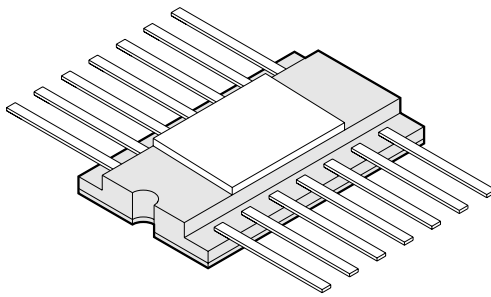


FPT-14C-A02

|  |                |            |
|--|----------------|------------|
| <p>14-pin ceramic SOP</p>  <p>(FPT-14C-A02)</p> | Lead pitch     | 50 mil     |
|  | Lead shape     | Straight   |
|  | Sealing method | Metal seal |
|  |                |            |
|  |                |            |
|  |                |            |
|  |                |            |

14-pin ceramic SOP  
(FPT-14C-A02)

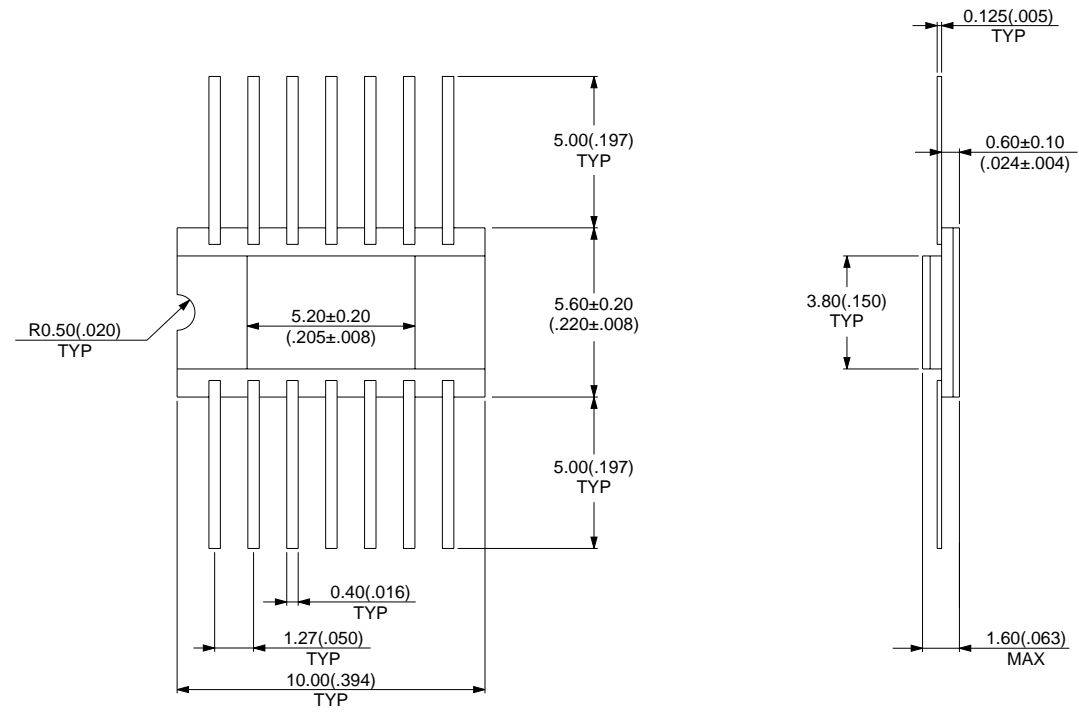

Technical drawing showing dimensions for the 14-pin ceramic SOP (FPT-14C-A02). Dimensions are provided in mm (inches).

Key dimensions from the drawing:

- Top lead height: 0.125(.005) TYP
- Lead thickness: 0.60±0.10 (.024±.004)
- Lead height from body: 3.80(.150) TYP
- Lead width: 1.60(.063) MAX
- Body height (top): 5.00(.197) TYP
- Body height (middle): 5.60±0.20 (.220±.008)
- Body height (bottom): 5.00(.197) TYP
- Lead pitch: 5.20±0.20 (.205±.008)
- Lead width: 0.40(.016) TYP
- Lead offset: 1.27(.050) TYP
- Lead length: 10.00(.394) TYP
- Lead angle radius: R0.50(.020) TYP

© 1994 FUJITSU LIMITED F14008SC-2-2

Dimensions in mm (inches).

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering. FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of the information or package dimensions in this document.